


ENGINEERING DESIGN - Proposed Scope of Work

Storrs St, CCD

Install approximately 450' of 6" PL LP main from Storrs St to back of 6 Eagle Sq. Install 4" PL LP gas service to building. 2' paving cutback in pavement. 5' wide 2" thick asphalt paving on Storrs Ave sidewalk. Allowance included for shoring and extra depth in area of parking garage.

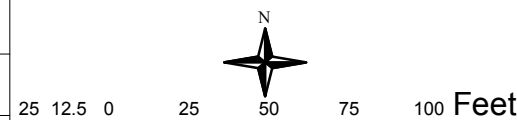

NOTE: The location of surface and underground objects shown are not warranted to be correct.

ENGINEER	BRF	SIZE	6"
DATE	08/31/2017	MATERIAL	PL
LENGTH	450'	PRESSURE	LP
SECTIONALS		WORK ORDER #	401747-37649

